


# 01 What it Can Run

## Genki 500W Portable Power Unit

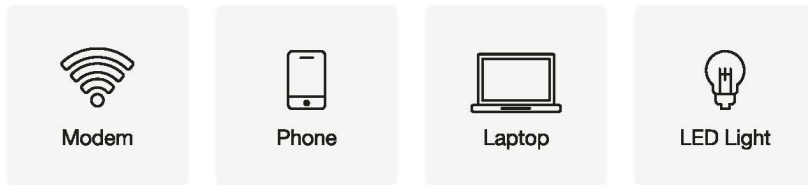

These appliances can run up to +/- 3 hours


## Genki 1000W Portable Power Unit



These appliances can run up to +/- 5 hours

# 02 4 Ways to Charge

Recharge by AC Outlet & PD Input together  
Speed Increases **100%**

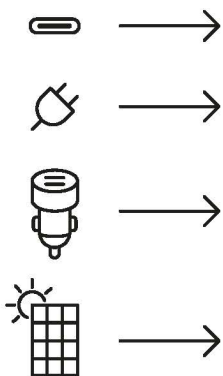

- PD Charge
- AC Outlet
- Car Adaptor
- Solar Panels

Several ways to recharge GenKi battery station anywhere & anytime. 220 AC wall outlet or PD fast charge at home, or through DC carport or Solar Panel (purchase separately) outdoor.

# 03 Power Station Specifications

Model	GK-500	GK-1000
Capacity	139200mAh/14.8V/515Wh	324000mAh/3.6V/1166.4Wh
Power	500W	1000W
Output	DC Output 12/5A *2 Total 10A	DC Output 12V/5V *2 Total 10A
	USB Output 5V/2.4A *3 / QC3.0 *1	USB Output USB-A QC3.0 *2 / USB-B 5V/2.4A *2
	USB-A1 / 2 / 3 USB-A2 & A3 5V/4.8V (max.) QC3.0 5V/3A 9V/2A 12V/1.5A	USB-C I/O PD100W(max.)
	USB-C I/O PD60W(max.) 5V/3A 9V/3A 12V/3A 15V/3A 20V/3A	USB-C Output PD27W(max.)
AC Output	220V/50Hz	220V/50Hz
Waveform	Pure Sine Wave	Pure Sine Wave
Size	260(L) x 172(W) x 202(H)mm	340(L) x 231(W) x 206(H)mm
Weight	5.2kg	13kg

